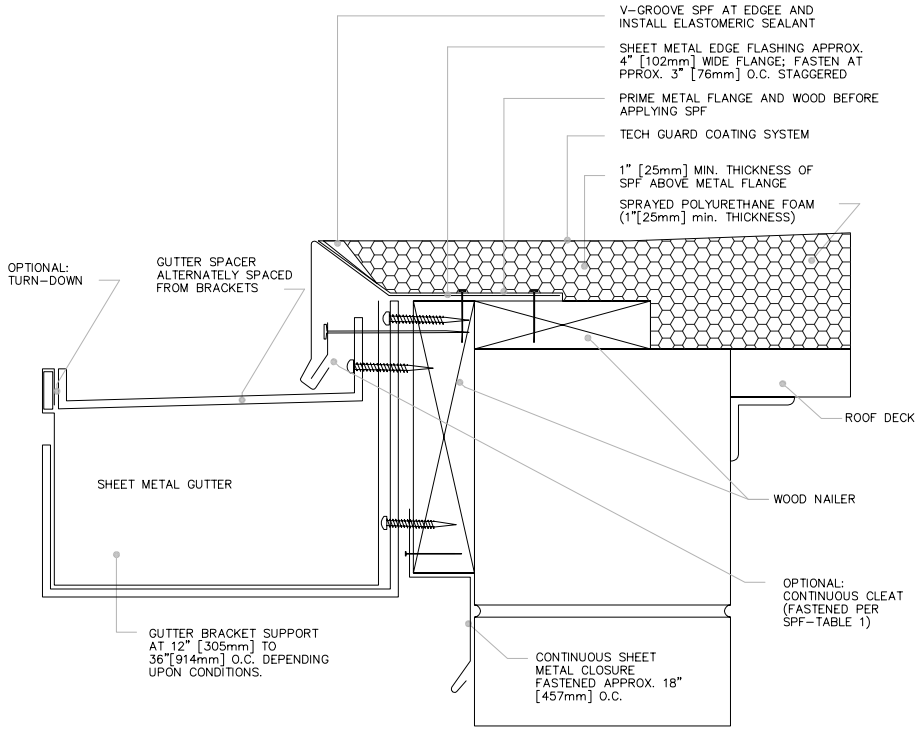

1. IN CLIMATES WHERE THE WINTER TEMPERATURE REMAINS BELOW FREEZING FOR EXTENDED PERIODS OF TIME, NRCA SUGGEST USING SPF-1 AND INTERIOR DRAINS OR THROUGH CURB SCUPPERS TO DRIAN THE ROOF.
2. THIS DETAIL SHOULD BE USED ONLY WHEN THE DECK IS SUPPORTED BY THE OUTSIDE WALL.
3. ATTACH NAILER TO WALL/DECK WITH SUITABLE FASTENERS.
4. FREQUENT NAILING OF SHEET METAL FLANGE IS ENCESSARY TO MINIMIZE THERMAL MOVEMENT.
5. GUTTER BRACKETS ARE RECOMMENDED TO BE AT LEASE ONE GAUGE HEAVIER THAN GUTTER STOCK.
6. DESIGN GUTTER EXPANSION JOINTS PLACED AT APPROPRIATE INTERVALS COMMENSURATE WITH TYPE OF METAL.
7. ELASTOMERIC SEALANT TO BE COMATIBLE WITH COATING.

proTech PRODUCTS, INC.
3003 North 73rd Street, Scottsdale, AZ 85251
402 East Grand Road, Tuscon, AZ 85705

GUTTER (dwg. 38)	DRAWN BY:	DATE:	APPROVED:
	SCALE:	PROJECT NO:	DRAWING NO.